

Thank you for
choosing
FANCY GRACE !

Discover our exceptional products
and services today



PORTABLE SOLUTIONS FOR COMFORT

CATALOG FOR 2026~



Professional
Manufacturer
since 1983



For inquiries, contact us at
www.fancygraceintl.com
E-mail : info@fancygraceintl.com

Head Office :

Address : Flat J, 9/F, Valiant Ind.Ctr., 2-12 Au Pui Wan St., Fo Tan, N.T., Hong Kong
Email: info@fancygraceintl.com

Branch: Fancy Grace International Limited Taiwan Branch

Address : Rm. 5A10, 5F., No. 5, Sec. 5, Xinyi Rd., Xinyi Dist., Taipei City 110, Taiwan (R.O.C.)
Tel: 886-2-2720-1799

Factory: King Post (Jiujiang) Industrial Co., Ltd

Address : Industrial Ave., Gonggongcheng City, Jiujiang, Jiangxi Province, China
Tel: 86-792-4399988






Established in :	1983
Main Products:	Portable Air Conditioner, Dehumidifier, Desiccant, Air Purifier, Caravan Air Conditioner
Head Office:	Hong Kong
Branch:	Taipei, Taiwan
Plants Location:	Jiujiang / Jiangxi province China(290,000sqm)
Employees:	600
R&D Engineers:	25
Production Lines :	4
In House Capabilities:	R&D, Design, QA, Tooling, Injection, Motor Production, Assembling
Main Export Markets:	Europe 50%
	Asia 25%
	North America 10%
	Others 15%



KING POST (Jiujiang) INDUSTRIAL CO., LTD

- ◆ Taiwanese manufacturer with Factory in China
- ◆ Aims to be the leading innovator and manufacturer of eco-friendly home comfort solutions valued by customers in global markets.
- ◆ Dedicates to researching, developing and supplying of innovative and eco-friendly solutions for indoor climate control in maximizing personal comfort level of each individual consumers.

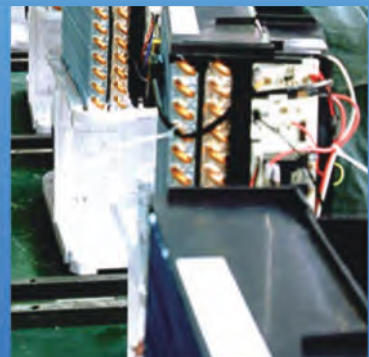



QUALITY & SERVICE

MILESTONES

- 1983 Established in Taiwan producing air coolers and heating fans in a 2500 sqm factory with 120 operators
- 1989 Start production of Portable Air Conditioner
- 1992 Expanded the production to Dongguan, China in a 6,000 sqm factory with 250 operators performing R & D, Motor Production and Product Assembly in house
- 1996 Certified by ISO9002 Quality System
- 1997 Extended product lines by including Split Portable Air Conditioners and Dehumidifiers
- 1999 Set up second plant sized 18,000 sqm and in house injection department
- 2001 Set up in house tool shop
- 2002 Certified by ISO9001/2000 version
- 2003 Extended plant size to 30,000 sqm ; built 2 production lines with monthly capacity to 60,000 units of Portable Air Conditioners and Dehumidifiers
- 2010 Complete new plant in Jiujiang sized 290,000 sqm with monthly capacity reaching 80,000 ~ 100,000 units of Portable Air Conditioner and Dehumidifiers
- 2015 amfori BSCI accredited
- 2017 Certified by ISO9001/2015 version
- 2018 R290 production line certified by TÜV/SÜD
- 2022 ISO14001:2015 accredited

All the products inside are patented, specification are subject to change without notice.



Affordable Luxury



Series **A**



Series **B**





Series C





Series F



Auto Swing

Soft Touch control

WiFi control
(optional)Heating
(optional)TiO₂/Photocatalyst
(optional)

Discover Our New Portable Air Conditioners:

Introducing our latest line of portable air conditioners, designed for exceptional cooling performance at a budget-friendly price. Featuring innovative downsized inner construction, these units offer powerful cooling in a compact form. With a modern, soft-touch design, they blend seamlessly into any space.

Key Features:

Compact & Powerful: Efficient cooling in a small package, perfect for any room size.
Energy Efficient: Advanced technology ensures maximum cooling with minimal energy use.
User-Friendly: Easy-to-use controls for personalized comfort.
Stylish Design: Sleek soft-touch finish for a contemporary look.
Affordable: High-quality cooling at a price that fits your budget.

Models:

Choose the perfect model to suit your style and cooling needs. Enjoy the luxury of a cool, comfortable environment without compromising on aesthetics or cost.



A

B

C

F



Model No.	FGA-9096 FGA-9096B FGA-9096C FGA-9096F	FGA-1096 FGA-1096B FGA-1096C FGA-1096F	FGA-1196 FGA-1196B FGA-1196C FGA-1196F	FGA-1296 FGA-1296B FGA-1296C FGA-1296F
Power supply	220-240V/50Hz			
Cooling capacity	9000BTU/2.6kW	10000BTU/2.9kW	11000BTU/3.3kW	12000BTU/3.4kW
Power/Ampere consumption	950W/4.1A	1110W/4.9A	1270W/5.7A	1345W/5.8A
Dehumidify capacity	24L/day	26L/day	28L/day	30L/day
Air volume (max.)	380m ³ /h	380m ³ /h	380m ³ /h	460 m ³ /h
Compressor type	Rotary			
Refrigerant	R290			
Fan Speed	3			
Timer	1 to 24hours			
Exhaust pipe	150 x 1500mm		165 x 1500 mm	
N.W./G.W.	22.5/24.5kg	23.5/25.5kg	24/26kg	26/28 Kg
Product size (WxDxH)	330 x 329 x 704mm		330 x 329 x 704mm	
Carton size (WxDxH)	385 x 358 x 885mm		404 x 359 x 900mm	
Container loading q'ty	192/396/593 sets (20'GP/40'GP/40'HC)		180/366/366 sets (20'GP/40'GP/40'HC)	

Slim Comfort



Series **A**




Series **C**



Auto Swing

Series **F**

Soft Touch control**WiFi control (optional)****TiO₂/Photocatalyst(optional)**

Offering the same modern aesthetics and innovative features as our "Affordable Luxury" line but in a more compact form. These units are perfect for those who need efficient cooling in smaller spaces and want to maximize container loading for reduced transportation costs.

Key Features:

- 1.Space-Saving Design: Slim and compact, these units are ideal for smaller rooms and apartments, providing effective cooling without taking up much space.*
- 2.Efficient Cooling: Despite their smaller size, these air conditioners deliver reliable cooling performance, perfect for maintaining comfort in various climates.*
- 3.Easy Portability: Lightweight and equipped with convenient handles and wheels, these units are easy to move from room to room, offering flexibility and convenience.*
- 4.Modern Aesthetic: Featuring a sleek, soft-touch design, these units complement any decor while providing powerful cooling.*
- 5.Cost-Effective Transportation: The compact design allows for more efficient container loading, reducing shipping costs for overseas importers.*

Model No.	FGA-5096 Slim FGA-5096C Slim FGA-5096F Slim	FGA-7096 Slim FGA-7096C Slim FGA-7096F Slim	FGA-9096 Slim FGA-9096C Slim FGA-9096F Slim
Power supply	220-240V/50Hz		
Cooling capacity	5000BTU/1.5kW	7000BTU/2.0kW	9000BTU/2.6kW
Power/Ampere consumption	580W/2.5A	765W/3.4A	950W/4.1A
Dehumidify capacity	5.8L/day	13.5L/day	24L/day
Air volume (max.)	380m ³ /h	380m ³ /h	380m ³ /h
Compressor type	Rotary		
Refrigerant	R290		
Fan Speed	3		
Timer	1 to 24 hours		
Exhaust pipe	Ø150 x 1500 mm		
N.W./G.W.	19.5/21.5 Kg	21/23 Kg	22.5/24.5 Kg
Product size (WxDxH)	328 x 280 x 700mm		
Carton size (WxDxH)	370 x 323 x 885mm		
Container loading q'ty	214/450/678 sets (20'GP/40'GP/40'HC)		



- ✦ 4 functions in 1:Auto/Cooling/Fan/Dehumidify
- ✦ Thermostatic Cut Off, Auto Shut Off, Overheating Protection, Auto Diagnosis
- ✦ Energy saving sleep function and Breeze Mode
- ✦ Anti-bacteria water tray and water tank inside , no germ & bacteria will be built up inside.
- ✦ Adjustable air vent
- ✦ Easy to manoeuvre on casters
- ✦ Air cooling system, no need for frequent drainage except the extreme wet weather (R.H. over 90%)

Model No.	FGA-7075	FGA-8075	FGA-9075	FGA-1075
Power supply	220-240V/50Hz			
Cooling capacity	7000BTU/2.1kW	8000BTU/2.3kW	9000BTU/2.6kW	10000BTU/2.93kW
Power/Ampere consumption	810W/3.6A	885W/4.0A	1000W/4.5A	1130W/5.0A
Dehumidify capacity	15L/day	17L/day	22L/day	27L/day
Air volume (max.)	370m ³ /h	370m ³ /h	370m ³ /h	370m ³ /h
Compressor type	Rotary			
Refrigerant	R290			
Fan Speed	3			
Timer	1 to 24hours			
Exhaust pipe	150 x 1500mm			
N.W./G.W.	22.5/24.5kg	23.5/25.5kg	25/27kg	27/29kg
Product size (WxDxH)	317 x 402 x 770mm			
Carton size (WxDxH)	380 x 550 x 830mm			
Container loading q'ty	120/252/378 sets (20'GP/40'GP/40'HC)			




Control panel with pilot light

- ✦ 4 functions in 1: Auto/cooling/Fan/Dehumidify
- ✦ Thermostatic Cut Off, Auto Shut Off, Overheating Protection, Auto Diagnosis
- ✦ Energy saving sleep function and Breeze Mode
- ✦ Anti-bacteria water tray and water tank inside , no germ & bacteria will be built up inside.
- ✦ Adjustable air vent
- ✦ Easy to manoeuvre on casters
- ✦ Power indicator light
- ✦ Air cooling system, no need for frequent drainage except the very wet weather (R.H. over 90%)

Model No.	FGA-7075B	FGA-8075B	FGA-9075B	FGA-1075B
Power supply	220-240V/50Hz			
Cooling capacity	7000BTU/2.1kW	8000BTU/2.3kW	9000BTU/2.6kW	10000BTU/2.93kW
Power/Ampere consumption	810W/3.6A	885W/4.0A	1000W/4.5A	1130W/5.0A
Dehumidify capacity	15L/day	17L/day	22L/day	27L/day
Air volume (max.)	370m ³ /h	370m ³ /h	370m ³ /h	370m ³ /h
Compressor type	Rotary			
Refrigerant	R290			
Fan Speed	3			
Timer	1 to 24hours			
Exhaust pipe	150 x 1500mm			
N.W./G.W.	22.5/24.5kg	23.5/25.5kg	25/27kg	27/29kg
Product size (WxDxH)	317 x 402 x 770mm			
Carton size (WxDxH)	380 x 550 x 830mm			
Container loading q'ty	120/252/378 sets (20'GP/40'GP/40'HC)			

With Style

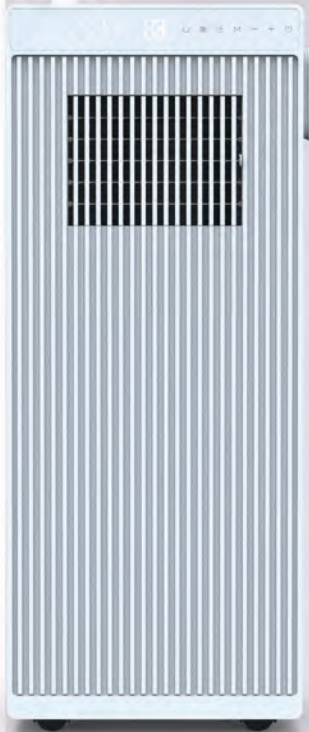

VINTAGE STYLING
SOFT TOUCH CONTROL PANEL
AUTO SWING



REMOTE CONTROL IS
MAGNETICALLY ATTACHED TO
THE SIDE OF THE PRODUCT

Soft Touch control**AUTO SWING****HEATING (optional)****WiFi control (optional)**

1. Vintage styling, remote control is magnetically attached to the side of the product
2. Soft Touch Control Panel
3. Auto Swing
4. 3 operation modes: Auto/Cooling/Fan (+ Heating available at extra cost)
5. Self-Evaporative System
6. Energy Saving, Sleep function, quiet operation by Breeze mode
7. Thermostatic Cut-Off, Auto-Shut Off, Over-Heating Protection, Auto Diagnosis
8. Auto-Restart
9. Anti-bacteria water tray and water tank for a germ-free environment
10. Air cooling system, no need for frequent drainage except very wet weather (humidity over 90%)
11. Optional feature : WiFi, Heat pump

Model No.	FGA-7075C	FGA-8075C	FGA-9075C	FGA-1075C
Power supply	220-240V/50Hz			
Cooling capacity	7000BTU/2.1kW	8000BTU/2.3kW	9000BTU/2.6kW	10000BTU/2.93kW
Power/Ampere consumption	810W/3.6A	885W/4.0A	1000W/4.5A	1130W/5.0A
Dehumidify capacity	15L/day	17L/day	22L/day	27L/day
Air volume (max.)	370m ³ /h	360m ³ /h	360m ³ /h	360m ³ /h
Compressor type	Rotary			
Refrigerant	R290			
Fan Speed	3			
Timer	1 to 24hours			
Exhaust pipe	150 x 1500mm			
N.W./G.W.	22.5/24.5kg	23.5/25.5kg	24.5/26.5kg	25.8/27.8kg
Product size (WxDxH)	317 x 366 x 785mm			
Carton size (WxDxH)	394 x 580 x 835mm			
Container loading q'ty	114/240/360 sets(20'GP/40'GP/40'HC)			



**EER A+
available!!**

- ✦ LED Touch panel
- ✦ 4 functions in 1: Auto/Cooling/Fan/Dehumidify
- ✦ Thermostatic Cut Off, Auto Shut Off, Overheating Protection, Auto Diagnosis
- ✦ Energy saving sleep function and Breeze Mode
- ✦ Anti-bacteria water tray and water tank inside , no germ & bacteria will be built up inside.
- ✦ Easy to manoeuvre on casters
- ✦ Power indicator light
- ✦ Air cooling system, no need for frequent drainage except the very wet weather (R.H. over 90%)

Optional feature: Heating, WiFi, TiO₂

Model No.	FGA-9081	FGA-1081	FGA-1281	FGA-1181A+
Power supply	220-240V/50Hz			
Cooling capacity	9000BTU/2.6kW	10000BTU/2.9kW	12000BTU/3.5kW	11500BTU/3.3kW
Power/Ampere consumption	1020W/4.6A	1150W/5.1A	1350W/6A	1060W/4.8A
Dehumidify capacity	15L/day	29L/day	31L/day	32L/day
Air volume (max.)	450m ³ /h	450m ³ /h	410m ³ /h	390m ³ /h
Compressor type	Rotary			
Refrigerant	R290			
Fan Speed	3			
Timer	1 to 24hours			
Exhaust pipe	150 x 1500mm			
N.W./G.W.	24.5/27kg	25.5/28kg	28.5/31kg	27/29.5kg
Product size (WxDxH)	352 x 394 x 846mm			
Carton size (WxDxH)	575 x 425 x 880mm			
Container loading q'ty	104/216/326 sets (20'GP/40'GP/40'HC)			



**EER A+
available!!**

- ✦ LED Touch panel
- ✦ 4 functions in 1: Auto/Cooling/Fan/Dehumidify
- ✦ Thermostatic Cut Off, Auto Shut Off, Overheating Protection, Auto Diagnosis
- ✦ Energy saving sleep function and Breeze Mode
- ✦ Anti-bacteria water tray and water tank inside, no germ & bacteria will be built up inside.
- ✦ Easy to manoeuvre on casters
- ✦ Power indicator light
- ✦ Air cooling system, no need for frequent drainage except the very wet weather (R.H. over 90%)

Optional feature: Heating, WiFi, TiO₂

Model No.	FGA-9081B	FGA-1081B	FGA-1281B	FGA-1181BA+
Power supply	220-240V/50Hz			
Cooling capacity	9000BTU/2.6kW	10000BTU/2.9kW	12000BTU/3.5kW	11500BTU/3.3kW
Power/Ampere consumption	1020W/4.6A	1150W/5.1A	1350W/6A	1060W/4.8A
Dehumidify capacity	15L/day	29L/day	31L/day	32L/day
Air volume (max.)	450m ³ /h	450m ³ /h	410m ³ /h	390m ³ /h
Compressor type	Rotary			
Refrigerant	R290			
Fan Speed	3			
Timer	1 to 24hours			
Exhaust pipe	150 x 1500mm			
N.W./G.W.	24.5/27kg	25.5/28kg	28.5/31kg	27/29.5kg
Product size (WxDxH)	352 x 394 x 846mm			
Carton size (WxDxH)	575 x 425 x 880mm			
Container loading q'ty	104/216/326 sets (20'GP/40'GP/40'HC)			



- ✦ Super power-Working up to 43°C
- ✦ 2 Control panel types: Digital Control & Soft touch panel
- ✦ Super Efficiency-Built-in energy saving function
- ✦ 4 functions in 1:Auto/Cooling/Fan/Dehumidify
- ✦ Thermostatic Cut Off, Auto Shut Off, Overheating Protection, Auto Diagnosis
- ✦ Anti-bacteria water tray and water tank inside , no germ & bacteria will be built up inside
- ✦ Adjustable air vent
- ✦ Easy to manoeuvre on casters
- ✦ Air cooling system, no need for frequent drainage except the extreme wet weather (R.H. over 90%)

Optional feature: Heating, WiFi

Model No.	FGA-1477A FGA-1477B	FGA-1577A FGA-1577B
Power supply	220-240V/50Hz	
Cooling capacity	14000BTU/4.1kW	15000BTU/4.3kW
Power/Ampere consumption	1380W/6.2A	1650W/7.7A
Dehumidify capacity	35.5L/day	43L/day
Air volume (max.)	500m ³ /h	520m ³ /h
Compressor type	Rotary	
Refrigerant	R290	
Fan Speed	3	
Timer	1 to 24hours	
Exhaust pipe	165 x 1500mm	
N.W./G.W.	33.50/38.50kg	42.5/45.5kg
Product size (WxDxH)	453 x 427 x 806mm	
Carton size (WxDxH)	570 x 500 x 1050mm	
Container loading q'ty	88/192/192 sets (20'GP/40'GP/40'HC)	

EER A+ Available~



- ◆ 4 functions in 1:Auto/cooling/Fan/Dehumidify
- ◆ Thermostatic Cut Off, Auto Shut Off, Overheating Protection, Auto Diagnosis
- ◆ Super Efficiency-Built-in energy saving function
- ◆ Anti-bacteria water tray and water tank inside , no germ & bacteria will be built up inside
- ◆ Adjustable air vent
- ◆ Easy to manoeuvre on casters
- ◆ Power indicator light
- ◆ Air cooling system, no need for frequent drainage except the very wet weather(R.H.over 90%)

Optional feature: Heating, WiFi, TiO₂

Model No.	FGA-1272	FGA-1372	FGA-1472	FGA-1172A+
Power supply	220-240V/50Hz			
Cooling capacity	12000BTU/3.4kW	13000BTU/3.8kW	14000BTU/4.1kW	11000BTU/3.2kW
Power/Ampere consumption	1300W/5.8A	1380W/6.2A	1420W/6.2A	1030W/4.6A
Dehumidify capacity	31L/day	41L/day	38.4L/day	30L/day
Air volume (max.)	510m ³ /h	430m ³ /h	460m ³ /h	490m ³ /h
Compressor type	Rotary			
Refrigerant	R290			
Fan Speed	3			
Timer	1 to 24hours			
Exhaust pipe	150 x 1500mm			
N.W./G.W.	30.2/32.8kg	31.1/33.8kg	31.5/34kg	30.5/33.2kg
Product size (WxDxH)	415 x 418 x 790mm			
Carton size (WxDxH)	480 x 600 x 845mm			
Container loading q'ty	90/184/276 sets(20'GP/40'GP/40'HC)			



FGA-1063/FGA-1263

- ✦ Super power-Working up to 43 °C
- ✦ Super Efficiency-Built-in energy saving function
- ✦ 3 functions in 1:Auto/Cooling/Fan (heating function is optional)
- ✦ Thermostatic Cut Off, Auto Shut Off, Overheating Protection, Auto Diagnosis
- ✦ Anti-bacteria water tray and water tank inside , no germ & bacteria will be built up inside.
- ✦ Adjustable air vent
- ✦ Easy to manoeuvre on casters
- ✦ Air cooling system, no need for frequent drainage except the extreme wet weather(R.H. over 90%)

Model No.	FGA-1063 FGA-1063B	FGA-1263 FGA-1263B
Power supply	220-240V/50Hz	
Cooling capacity	10000BTU/2.93kW	12000BTU/3.5kW
Power/Ampere consumption	1100W/4.9A	1300W/5.8A
Dehumidify capacity	29L/day	36L/day
Air volume (max.)	410m ³ /h	410m ³ /h
Compressor type	Rotary	
Refrigerant	R290	
Fan Speed	3	
Timer	1 to 24hours	
Exhaust pipe	150 x 1500mm	
N.W./G.W.	27.0/32.0kg	31/34kg
Product size (WxDxH)	420 x 405 x 790mm	
Carton size (WxDxH)	583 x 483 x 868mm	
Container loading q'ty	96/192/288 sets (20'GP/40'GP/40'HC)	



FGA-1063B/FGA-1263B



- ✦ 4 functions in 1 :Auto/cooling/Fan/Dehumidify (heating function is optional)
- ✦ Thermostatic Cut Off, Auto Shut Off, Overheating Protection, Auto Diagnosis
- ✦ Super Efficiency-Built-in energy saving function
- ✦ Anti-bacteria water tray and water tank inside, no germ & bacteria will be built up inside.
- ✦ Adjustable air vent
- ✦ Easy to manoeuvre on casters
- ✦ Air cooling system, no need for frequent drainage except the extreme wet weather(R.H. over 90%)

Model No.	FGA-1069 FGA-1069B	FGA-1269 FGA-1269B
Power supply	220-240V/50Hz	
Cooling capacity	10000BTU/2.93kW	12000BTU/3.4kW
Power/Ampere consumption	1060W/4.7A	1280W/5.7A
Dehumidify capacity	31L/day	39L/day
Air volume (max.)	350m ³ /h	350m ³ /h
Compressor type	Rotary	
Refrigerant	R290	
Fan Speed	3	
Timer	1 to 24hours	
Exhaust pipe	142 x 1400mm	
N.W./G.W.	28.5/30.5kg	29.1/31.2kg
Product size (WxDxH)	485 x 313 x 743mm	
Carton size (WxDxH)	530 x 360 x 780mm	
Container loading q'ty	201/423/423 sets (20'GP/40'GP/40'HC)	



FGA-1069/FGA-1269



FGA-1069B/FGA-1269B



Introducing our sleek and modern portable air conditioner, featuring an exceptionally large control panel for easy and intuitive operation. This unit combines powerful cooling with user-friendly functionality, making it the perfect choice for creating a comfortable environment in any room.

Optional function: Heating, WiFi, TiO₂



Model No.	FGA-7057D	FGA-8057D	FGA-9057D
Power supply	220-240V/50Hz		
Cooling capacity	7000BTU/2.0kW	8000BTU/2.3kW	9000BTU/2.6kW
Power/Ampere consumption	770W/3.5A	840W/3.8A	980W/4.5A
Dehumidify capacity	19L/day	20L/day	24L/day
Air volume (max.)	320m ³ /h	310m ³ /h	320m ³ /h
Compressor type	Rotary		
Refrigerant	R290		
Fan Speed	3		
Timer	1 to 24hours		
Exhaust pipe	150 x 1500mm		
N.W./G.W.	21.1/23kg	23/25kg	24.6/26.6kg
Product size (WxDxH)	305 x 387 x 752mm		
Carton size (WxDxH)	347 x 570 x 786mm		
Container loading q'ty	191/407/408 sets (20'GP/40'GP/40'HC)		



Meet our long-standing favorite in portable air conditioning. This model features a classic design with traditional digital buttons for straightforward operation. Known for its reliability and consistent performance, delivers powerful cooling to keep your space comfortable, making it a trusted choice whenever you need.

Optional function: Heating



Model No.	FGA-7057C	FGA-8057C	FGA-9057C
Power supply	220-240V/50Hz		
Cooling capacity	7000BTU/2.0kW	8000BTU/2.3kW	9000BTU/2.6kW
Power/Ampere consumption	770W/3.5A	840W/3.8A	980W/4.5A
Dehumidify capacity	19L/day	20L/day	24L/day
Air volume (max.)	320m ³ /h	310m ³ /h	320m ³ /h
Compressor type	Rotary		
Refrigerant	R290		
Fan Speed	3		
Timer	1 to 12hours		
Exhaust pipe	150 x 1500mm		
N.W./G.W.	21.1/23.2kg	23/25kg	24.6/26.65kg
Product size (WxDxH)	305 x 387 x 752mm		
Carton size (WxDxH)	347 x 570 x 786mm		
Container loading q'ty	191/407/408 sets (20'GP/40'GP/40'HC)		



A057



A057B



A061



A061B

Classic Series:

Proven Performance with Modern Comfort

Energy Efficiency: With an A energy efficiency ratio, these units offer strong cooling while conserving energy.

Versatile Modes: Includes Auto, Cooling, and Fan modes; optional heating available at extra cost.

Customizable Comfort: 2 fan speeds, 12-hour timer, Sleep function, and a temperature range of 18-32°C .

Intuitive Indicators: Displays for room temperature, water full, and compressor status.

Advanced Cooling: Self-evaporative system minimizes drainage needs, even in high humidity.

Health and Safety: Anti-bacteria water tray, thermostatic cut-off, auto-shut off, and over-heating protection.

Convenient Features: Auto-restart after power outages, with optional Heating Pump.


Model No.	FGA-7057 FGA-7057B FGA-7061 FGA-7061B	FGA-8057 FGA-8057B FGA-8061 FGA-8061B	FGA-9057 FGA-9057B FGA-9061 FGA-9061B
Power supply	220-240V/50Hz		
Cooling capacity	7000BTU/2.0kW	8000BTU/2.3kW	9000BTU/2.6kW
Power/Ampere consumption	770W/3.5A	840W/3.8A	980W/4.5A
Dehumidify capacity	19L/day	20L/day	24L/day
Air volume (max.)	320m ³ /h	310m ³ /h	320m ³ /h
Compressor type	Rotary		
Refrigerant	R290		
Fan Speed	2		
Timer	1 to 12hours		
Exhaust pipe	150 x 1500mm		
N.W./G.W.	21.1/23kg	23/25kg	24.6/26.65kg
Product size (WxDxH)	305 x 387 x 752mm		
Carton size (WxDxH)	347 x 570 x 786mm		
Container loading q'ty	191/407/408 sets (20'GP/40'GP/40'HC)		

Ready to Go? Cold or Heat, we are with you !



- ✦ Air conditioner especially for motorhome & caravan & RV use.
- ✦ Cooling/Fan/Heating/Dry4 functions in 1 unit, designed for all weather, whether in scorching summer or freezing winter..
- ✦ One touch, smart function -by choosing the AUTO mode, the unit will activate the most suitable operation mode automatically according to the ambient condition.
- ✦ Compact and Lightweight design.
- ✦ Low starting current, quiet to run.
- ✦ 3 Blower speeds for maximum flexibility.
- ✦ Sleep function for quiet operation.
- ✦ Dual control-by indoor control panel or remote.
- ✦ Air conditioner adjusts to roofthickness of vehicle for perfect air conditioner results.
- ✦ Designed for stationary operation.

Model No.	FGA-3079H	FGA-3479H
Rated voltage	220-240V/50Hz	
Rated Cooling	3.0kW	3.4kW
Rated Heating	2.5kW	2.9kW
Power Consumption for Cooling	1250W/5.2A	1400W/6.2A
Power Consumption for Heating	1350W/6A	1680W/7.4A
Air volume (max.)	Indoor - 540 m ³ /h	Outdoor - 590 m ³ /h
Refrigerant	R32	
GWP (Global Warming Potential)	675	
Noise (max.)	Sound pressure - 57 dB	Sound power - 65 dB
Test Condition	Indoor - DB27°C , WB19°C	Outdoor - DB35°C , WB24°C
Control Type	Electronic	
Timer	1 to 24 hours	
Fan Speed	3	
Sleep function	yes	
Remote Control	yes	
Roof opening (WxD)	360x360 mm (also applicable for 400x400mm roof-opening, by extra installation frame/fixture)	
Product size (WxDxH) / N.W.	Indoor unit - 550x550x40 mm / 3 kg Outdoor unit - 630x1092x248 mm / 35 kg	
Container Loading q'ty	198/231 sets (40'GP/40'HC)	

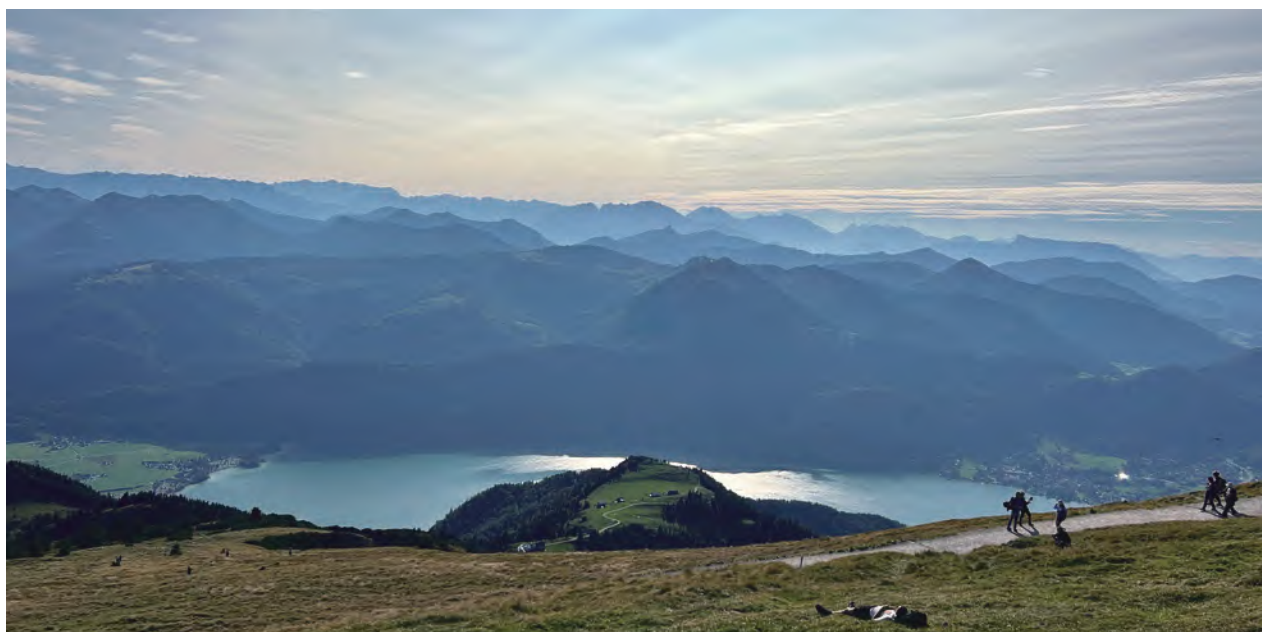

Sleek & Elegant



- Soft touch panel
- Classic design
- Anti-bacteria water tank , avoid built-up of mold and bacteria



Designed with a sleek and elegant look that complements any modern interior. This compact and efficient unit effectively reduces humidity, creating a more comfortable and healthier environment in your home or office. Its small size makes it easy to place anywhere, while its stylish design adds a touch of sophistication to your space.

Model no.	FGD-1070AE
Power Supply	220-240V~, 50Hz
Dehumidify capacity	10L/day
Power consumption	205W/1.17A
Air volume (max.)	140 m ³ /h
Fan Speed	2
Compressor	Reciprocating
Refrigerant	R290
Timer	1~24 hours
Working temperature	5~32°C
Water tank (water full level)	2.7L
N.W./G.W.	9.7kg/10.7kg
Product size (WxDxH)	280 x 193 x 405 mm
Carton size (WxDxH)	312 x 222 x 438 mm
Container loading q'ty	950/1960/2350 sets (20'GP/40'GP/40'HC)

Sleek & Elegant



Designed with a sleek and elegant look that complements any modern interior. This compact and efficient unit effectively reduces humidity, creating a more comfortable and healthier environment in your home or office. Its small size makes it easy to place anywhere, while its stylish design adds a touch of sophistication to your space.

Model No.	FGD-1071AE	FGD-1271AE
Power Supply	220-240V/50Hz	
Dehumidify capacity	10L/day	12L/day
Power consumption	250W/1.3A	200W/1.15A
Air volume (max.)	140m ³ /h	
Fan Speed	2	
Compressor	Reciprocating	
Refrigerant	R290	
Timer	1~24 hours	
Working temperature	5 ~ 32℃	
Water tank (water full level)	3L	
N.W./G.W.	10.5/11.5kg	10.6/11.6kg
Product size (WxDxH)	280 x 193 x 405mm	
Carton size (WxDxH)	310 x 222 x 438mm	
Container loading q'ty	950/1960/2350 sets(20'GP/40'GP/40'HC)	



Smart humidity indicator that lights up in three different colors to represent the ambient humidity level in the room.

Blue for high humidity > 70%
Green for optimal humidity 50 ~ 70%
Red for low humidity < 50%
Red light flash – water full alarm.

This easy-to-read feature helps you quickly assess and adjust the humidity in your space for maximum comfort and health.



Model No.	FGD-1071CE	FGD-1271CE
Power Supply	220-240V/50Hz	
Dehumidify capacity	10L/day	12L/day
Power consumption	250W/1.3A	200W/1.15A
Air volume (max.)	140m ³ /h	
Fan Speed	2	
Compressor	Reciprocating	
Refrigerant	R290	
Timer	1~24 hours	
Working temperature	5 ~ 32°C	
Water tank (water full level)	3L	
N.W./G.W.	10.5/11.5kg	10.6/11.6kg
Product size (WxDxH)	280 x 193 x 405mm	
Carton size (WxDxH)	310 x 222 x 438mm	
Container loading q'ty	950/1960/2350 sets(20'GP/40'GP/40'HC)	



ON/OFF Switch

SOFT TOUCH Panel




- ◆ *SOFT TOUCH Panel*
- ◆ *Classic design*
- ◆ *Active carbon filter plus washable dust filter for better air quality*
- ◆ *Basic or electronic version is optional*
- ◆ *5 sections humidity setting*
- ◆ *2.5L Anti-bacteria water tank, avoids built-up of mold and bacteria*
- ◆ *Auto-restart for Electronic model*



Model No.	FGD-1055B FGD-1055BE	FGD-1255B FGD-1255BE	FGD-1455B FGD-1455BE
Power Supply	220-240V/50Hz		
Dehumidify capacity	10L/day	12L/day	14L/day
Power consumption	290W/1.5A	290W/1.5A	280W/1.4A
Air volume (max.)	130m ³ /h		
Fan Speed	2		
Compressor	Reciprocating		
Refrigerant	R290		
Timer	NIL/24hrs		
Working temperature	5 ~ 32°C		
Water tank (water full level)	2.5L		
N.W./G.W.	10.5/11.5kg	10.6/11.6kg	10.8/11.8kg
Product size (WxDxH)	300 x 204 x 446 mm		
Carton size (WxDxH)	346 x 242 x 495 mm		
Container loading q'ty	624/1292/1615 sets (20'GP/40'GP/40'HQ)		

Ultimate Comfort Series- Intelligent Humidity Control

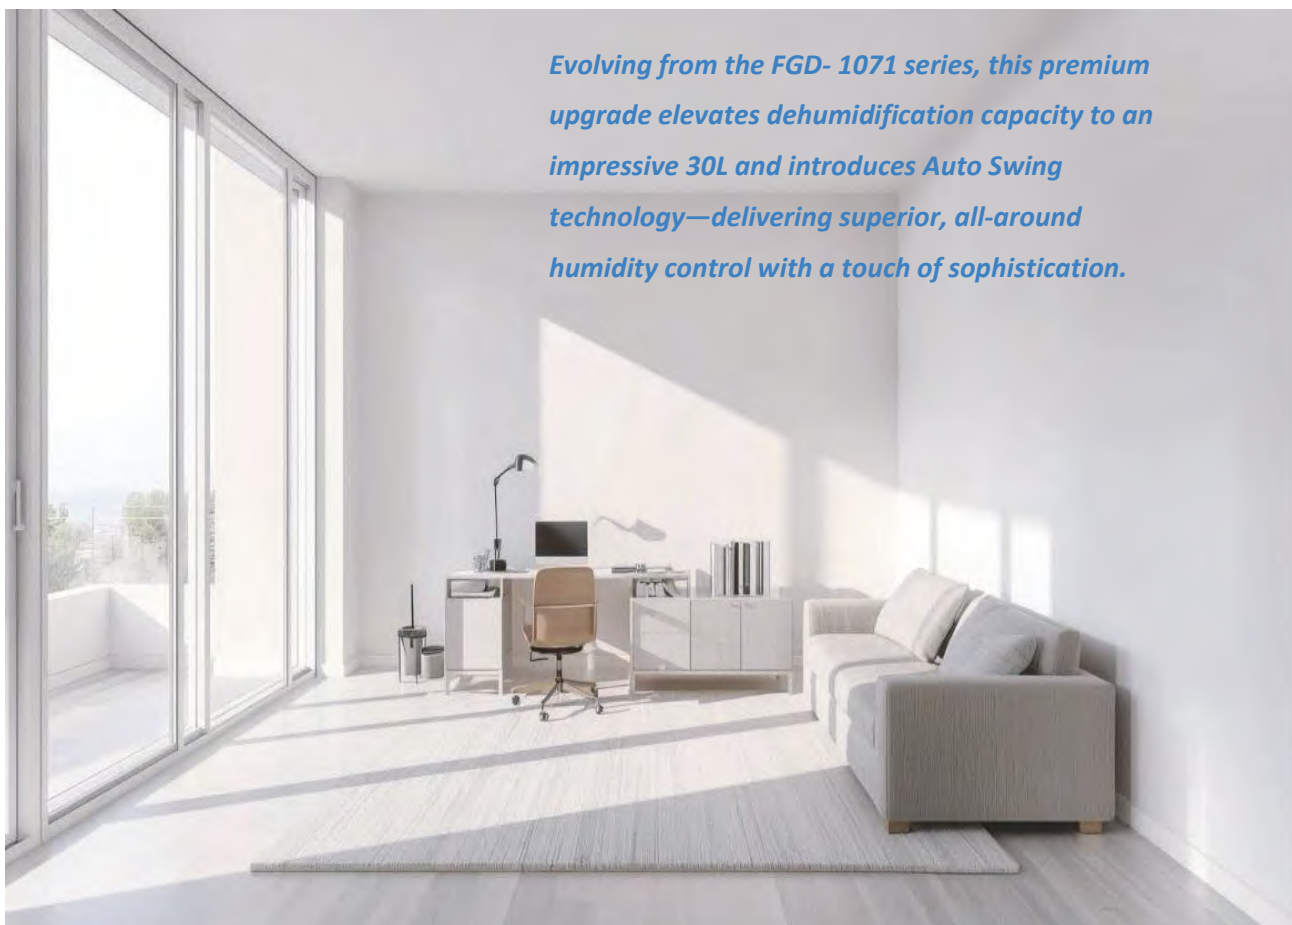

FGD- 1671AE/FGD-2071AE/FGD-2571AE/FGD-3071AE

FGD- 1671CE/FGD-2071CE/FGD-2571CE/FGD-3071CE



- ◆ *Horizontal Automatic Swing Function*
- ◆ *5L Anti -bacterial Large Water Tank*
- ◆ *Up to 30L High-Capacity Dehumidification*

- ◆ *Intuitive LED Touch Panel Control*
- ◆ *Five-level digital intelligent humidity control*



Model no.	FGD-1671AE FGD-1671CE	FGD-2071AE FGD-2071CE	FGD-2571AE FGD-2571CE	FGD-3071AE FGD-3071CE
Power Supply	220-240V/ 50Hz			
Dehumidify capacity	16L/day	20L/day	25L/day	30L/day
Power consumption	400W/2.1A	380W/2.05A	360W/1.7A	570W/ 2.55A
Air volume (max.)	170 m ³ /h			
Fan Speed	2			
Compressor	Reciprocating			Rotary
Refrigerant	R290			
Timer	1~24 hours			
Working temperature	5~32°C			
Water tank (water full level)	5L			
N.W./G.W.	12.5 / 14.5kg	13.25 / 15.25kg	11.35 / 13.35kg	12.9 / 14.9kg
Product size (WxDxH)	320 x 223 x 507mm			
Carton size (WxDxH)	356 x 251 x 560mm			
Container loading q'ty	576/1188/1188 sets (20'GP/40'GP/40'HC)			



Electronic control with LED display
FGD-1055EL/FGD-1255EL/FGD-1455EL



ON/OFF button only
FGD-1055/FGD-1255/FGD-1455



Electronic control
FGD-1055E/FGD-1255E/FGD-1455E

- ◆ Active carbon filter plus washable dust filter for better air quality
- ◆ Basic or electronic version is optional
- ◆ 5 sections humidity setting
- ◆ 2.5L Anti-bacteria water tank, avoids built-up of mold and bacteria
- ◆ Auto-restart for Electronic model

Model No.	FGD-1055 FGD-1055E FGD-1055EL	FGD-1255 FGD-1255E FGD-1255EL	FGD-1455 FGD-1455E FGD-1455EL
Power Supply	220-240V/50Hz		
Dehumidify capacity	10L/day	12L/day	14L/day
Power consumption	290W/1.5A	290W/ 1.5A	280W/1.4A
Air volume (max.)	130m ³ /h		
Fan Speed	1		
Compressor	Reciprocating		
Refrigerant	R290		
Timer	NIL/15hrs		
Working temperature	5 ~ 32°C		
Water tank (water full level)	2.5L		
N.W./G.W.	10.5/11.5kg	10.6/11.6kg	10.8/11.8kg
Product size (WxDxH)	300 x 204 x 429 mm		
Carton size (WxDxH)	346 x 242 x 467 mm		
Container loading q'ty	789/1630/1630 sets (20'GP/40'GP/40'HQ)		



ON/OFF button only
FGD-1052/FGD-1252



Electronic control
FGD-1052E/FGD-1252E

- ✦ Active carbon filter plus washable dust filter for better air quality
- ✦ Basic or electronic version is optional
- ✦ 5 sections humidity setting
- ✦ 2.8L Anti-bacteria water tank, avoids built-up of mold and bacteria
- ✦ Auto-restart for Electronic model

Model No.	FGD-1052 FGD-1052E	FGD-1252 FGD-1252E
Power Supply	220-240V/50Hz	
Dehumidify capacity	10L/day	12L/day
Power consumption	290W/1.5A	300W/ 1.7A
Air volume (max.)	100m ³ /h	
Fan Speed	1	
Compressor	Reciprocating	
Refrigerant	R290	
Timer	NIL/24hrs	
Working temperature	5 ~ 32℃	
Water tank (water full level)	2.8L	
N.W./G.W.	10.6/11.8kg	10.8/12kg
Product size (WxDxH)	310 x 220 x 465mm	
Carton size (WxDxH)	352 x 264 x 530mm	
Container loading q'ty	552/1144/1430 sets (20'GP/40'GP/40'HQ)	



FGD-1651AE / FGD-2051AE

A perfect blend of timeless design, durable quality, and exceptional value.

Crafted with high-quality materials, this dehumidifier is built to last, providing reliable performance and peace of mind. Excellent cost efficiency, a smart, long-term solution to maintaining a comfortable and healthy environment.

Features:

Tubo function for laundry purpose.

24 hours programmable timer

5 sections humidity setting

2 fan speed

3L Anti-bacteria water tank

Auto-Restart

Optional feature: TiO₂



FGD-1651BE/FGD-2051BE

Model No.	FGD-1651AE FGD-1651BE	FGD-2051AE FGD-2051BE
Power Supply	220-240V/50Hz	
Dehumidify capacity	16L/day	20L/day
Power consumption	415W/1.9A	390W/1.75A
Air volume (max.)	150m ³ /h	
Fan Speed	2	
Compressor	Reciprocating	
Refrigerant	R290	
Timer	1~24 hours	
Working temperature	5 ~ 32℃	
Water tank (water full level)	3L	
N.W./G.W.	14/15.5kg	15/17kg
Product size (WxDxH)	310 x 236 x 523mm	
Carton size (WxDxH)	360 x 291 x 573mm	
Container loading q'ty	486/1024/1024 sets (20'GP/40'GP/40'HC)	



FGD-1651CE / FGD-2051CE

Enhanced Dehumidifier with Soft Touch Control Panel

Upgrade your environment with our latest dehumidifier, combining timeless design with modern innovation. This model retains the classic elegance of its predecessor but introduces a new soft touch control panel with a bright, easy-to-read display.

Features:

Tubo function for laundry purpose.

24 hours programmable timer

5 sections humidity setting

2 fan speed



Model No.	FGD-1651CE	FGD-2051CE
Power Supply	220-240V/50Hz	
Dehumidify capacity	16L/day	20L/day
Power consumption	415W/1.9A	390W/1.75A
Air volume (max.)	150m ³ /h	
Fan Speed	2	
Compressor	Reciprocating	
Refrigerant	R290	
Timer	1~24 hours	
Working temperature	5 ~ 32°C	
Water tank (water full level)	3L	
N.W./G.W.	14/15.5kg	15/17kg
Product size (WxDxH)	310 x 236 x 523mm	
Carton size (WxDxH)	360 x 291 x 573mm	
Container loading q'ty	486/1035/1035 sets (20'GP/40'GP/40'HC)	



FGD-1646AE/FGD-2046AE

IP 21 APPROVAL

- ◆ Special humidity indicator in front panel which will light up in 3 different colors for users easy identification on room humidity:
 Blue light-room humidity>70%
 Green light -room humidity 50~70%
 Red light-room humidity<50%
 Red light flash- water full alarm
- ◆ Turbo function for laundry purpose
- ◆ Active carbon filter plus washable dust filter for better air quality
- ◆ 24 hours programmable timer
- ◆ 5 sections humidity setting
- ◆ 2 fan speed
- ◆ 5L big anti-bacteria water tank, avoids built-up of mold and bacteria
- ◆ Auto-restart

Model No.	FGD-1646AE FGD-1646BE	FGD-2046AE FGD-2046BE
Power Supply	220-240V/50Hz	
Dehumidify capacity	16L/day	20L/day
Power consumption	390W/1.75A	415W/1.9A
Air volume (max.)	150m ³ /h	
Fan Speed	2	
Compressor	Rotary	
Refrigerant	R290	
Timer	1~24	
Working temperature	5~32℃	
Water tank (water full level)	5L	
N.W./G.W.	10.5/11.6kg	11.3/12.5kg
Product size (WxDxH)	336 x 210 x 547mm	
Carton size (WxDxH)	385 x 260 x 583mm	
Container loading q'ty	504/1080/1080 sets (20'GP/40'GP/40'HQ)	



FGD-1646BE/FGD-2046BE



SLEEK&PORTABLE
upward airvent,convenient laundry dry



FGD-1646ACE
FGD-2046ACE



FGD-1646BCE
FGD-2046BCE

IP 21 APPROVAL

- ✦ Turbo function for laundry purpose
- ✦ Active carbon filter plus washable dust filter for better air quality
- ✦ 24 hours programmable timer
- ✦ 5 section humidity setting
- ✦ 2 fan speed
- ✦ 5L water tank
- ✦ Anti-bacteria water tank, avoids built-up of mold and bacteria
- ✦ Big handle at top for easy move
- ✦ Auto-restart



ONE TOUCH, SMART CONTROL-

By ONE TOUCH, the machine would work smartly according to ambient humidity. The humidity indicator at the front panel reports you the current humidity level all the way

- ✦ *Blue light* room humidity > 70%
- ✦ *Green light* - room humidity 50%~70%
- ✦ *Red light* room humidity < 50%
- ✦ *Red light flash* - water full alarm or the water tank is not in the position



Screen ON



Screen OFF



Model No.	FGD-1646ACE FGD-1646BCE	FGD-2046ACE FGD-2046BCE
Power Supply	220-240V/50Hz	
Dehumidify capacity	16L/day	20L/day
Power consumption	390W/1.75A	415W/1.9A
Air volume (max.)	150m ³ /h	
Fan Speed	2	
Compressor	Rotary	
Refrigerant	R290	
Timer	1~24	
Working temperature	5~32℃	
Water tank (water full level)	5L	
N.W./G.W.	10.5/11.6kg	11.3/12.5kg
Product size (WxDxH)	336 x 210 x 547mm	
Carton size (WxDxH)	385 x 260 x 583mm	
Container loading q'ty	393/807/1076 sets (20'GP/40'GP/40'HQ)	



- ◆ LED Touch panel
- ◆ Special humidity indicator in front panel which will light up in 3 different colors for users easy identification on **room humidity**:
 - Blue light-room humidity>70%
 - Green light-room humidity 50%~70%
 - Red light-room humidity<50%
 - Red light flash-water full alarm
- ◆ 6L big anti-bacteria water tank, avoids built-up of mold and bacteria
- ◆ Wifi function is optional by extra cost
- ◆ Shoes dryer function is optional by extra cost (extendable length from 25~80cm)
- ◆ Active carbon filter plus washable dust filter for better air quality
- ◆ 24 hours programmable timer
- ◆ 2 fan speed
- ◆ Auto-restart

Optional feature: WIFI, TiO₂, UVC - LED Sterilizer

Model No.	FGD-2068E	FGD-2568E	FGD-3068E
Power Supply	220-240V/50Hz		
Dehumidify capacity	20L/day	25L/day	30L/day
Power consumption	320W/1.5A	320W/1.5A	510W/2.2A
Air volume (max.)	180m ³ /h	230m ³ /h	230m ³ /h
Fan Speed	2		
Compressor	Rotary		
Refrigerant	R290		
Timer	1 to 24 hours		
Working temperature	5~32℃		
Water tank (water full level)	6L		
N.W./G.W.	12.3/13.5kg	12.8/14.2kg	13.9/15.1kg
Product size (WxDxH)	336 x 247 x 572mm		
Carton size (WxDxH)	382 x 292 x 660mm		
Container loading q'ty	333/687/916 sets (20'GP/40'GP/40'HQ)		





IPX4 APPROVAL

- ♦ Classic design
- ♦ METAL Casing
- ♦ Ideal for basement, Garage and Industrial Use
- ♦ Electronic control
- ♦ 6.5L Anti-bacteria water tank, avoids built-up of mold and bacteria, translucent color for reading the water level easily
- ♦ Optional feature with surcharge: Hot Gas Defrost system / Hour counter (for rent purpose)
- ♦ Auto-restart

Model No.	FGD-3036AE/FGD-3036AEG FGD-3036AET/FGD-3036AEGT
Power Supply	220-240V/50Hz
Dehumidify capacity	30L/day
Power consumption	540W/2.4A
Air volume (max.)	200m ³ /h
Fan Speed	1
Compressor	Rotary
Refrigerant	R290
Timer	NIL
Working temperature	5~32°C
Water tank (water full level)	6.5L
N.W./G.W.	18.6/20.2kg
Product size (WxDxH)	358 x 338 x 550mm
Carton size (WxDxH)	402 x 378 x 592mm
Container loading q'ty	252/522/696 sets (20'GP/40'GP/40'HQ)



FGD-2032E
FGD-3032E



FGD-3032FCE

Model No.	FGD-2032E	FGD-3032E FGD-3032FG FGD-3032ET FGD-3032EGT	FGD-3032E FGD-3032FG FGD-3032ET FGD-3032EGT
Power Supply	220-240V/50Hz		
Dehumidify capacity	20L/day	30L/day	30L/day
Power consumption	380W/2.1A	430W/ 1.9A	430W/1.9A
Air volume (max.)	200m ³ /h	250m ³ /h	250m ³ /h
Fan Speed	2		
Compressor	Rotary		
Refrigerant	R290		
Timer	NIL		
Working temperature	5~32℃		
Water tank (water full level)	4.7L		
N.W./G.W.	2.5/21.5kg	23.5/25.5kg	24/26kg
Product size (WxDxH)	330 x 335 x 580mm	305 x 335 x 580mm	435 x 345 x 680mm
Carton size (WxDxH)	350 x 380 x 635mm	350 x 380 x 635mm	460 x 385 x 650mm
Container loading q'ty	288/594/792 sets (20'GP/40'GP/40'HQ)		225/450/600 sets (20'GP/40'GP/40'HQ)

70L/90L Dehumidifier with LLDPE



Industrial-Grade Dehumidifier: Power and Durability for Demanding Environments

- ◆ *Durable Design:* Robust LLDPE housing ensures long-lasting performance in harsh environments.
- ◆ *Versatile Application:* Perfect for use in basements, garages, and industrial settings.
- ◆ *Advanced Features:* Includes a PURGE function, hourmeter, and hot gas defroster for optimal efficiency.
- ◆ *Adjustable Humidity Control:* Set the humidity level from 10% to 90%, with an internal pump capable of lifting water up to 5 meters.
- ◆ *Convenience:* 24-hour programmable timer and auto-restart after power failure for uninterrupted operation.
- ◆ *Protection & Safety:* Three-minute automatic delay protection for the compressor.
- ◆ *Continuous Drainage:* Equipped with a continuous drainage outlet, even if the water pump fails.
- ◆ *Stackable Design:* Save space with stackable design, allowing up to 2 units to be stacked.
- ◆ *Optional WiFi Function:* Enhance control with optional WiFi connectivity.
- ◆ *Dual Voltage Capability:* Compatible with both 110V and 230V/50Hz power supplies.

Model No.	FGD-7073	FGD-9073
Power Supply	220-240V/50Hz	
Dehumidify capacity	70L/day	90L/day
Power consumption	1130W	1290W
Air volume (max.)	550m ³ /h	550m ³ /h
Fan Speed	1	
Compressor	Rotary	
Refrigerant	R290	
Timer	1~24	
Working temperature	5~32°C	
Water tank (water full level)	Nil	
N.W./G.W.	36.7/39.1kg	39.4/41.8kg
Product size (WxDxH)	520 x 390 x 800mm	
Carton size (WxDxH)	573 x 459 x 878mm	
Container loading q'ty	100/206/308 sets (20'GP/40'GP/40'HQ)	

Desiccant Dehumidifier

Model no. DS3



Ultimate solution for moisture control in low-temperature environments. Unlike traditional compressor-based models that struggle or fail below 5°C, this desiccant technology ensures high drying efficiency even in these challenging conditions.

Key features:

- ✦ **High Drying Efficiency:** *Delivers exceptional moisture removal, especially effective in temperatures below 5°C .*
- ✦ **Reliable Operation:** *Consistently operates in cold environments where traditional dehumidifiers fail, providing continuous humidity control.*
- ✦ **Versatility:** *Ideal for cold storage, unheated basements, and other low-temperature areas.*
- ✦ **Consistent Performance:** *Maintains dependable moisture control regardless of ambient temperature, protecting your space from dampness and mold.*
- ✦ **Large Water Tank:** *Equipped with a 5L tank, reducing the need for frequent drainage; continuous drainage option available.*
- ✦ **Additional Air Clean Function:** *Includes an air cleaning feature at no extra cost.*
- ✦ **Advanced Air Purification Options:** *For enhanced air quality, optional HEPA filter, ionizer, or TiO₂ can be added at an additional cost.*

Ultimate Solution in Low Temperatures

Model no. DS3B



soft touch control panel with a bright, easy-to-read display.

- ✦ Blue for high humidity > 70%
- ✦ Green for optimal humidity 50 ~ 70%
- ✦ Red for low humidity < 50%
- ✦ Red light flash - water full alarm.



Model No.	DS3/DS3B
Power Supply	220-240V/50Hz
Dehumidify capacity	8.5L/day
Power consumption	730W/3.2A
Compressor/Refrigerant	NONE
Air volume (max.)	185m ³ /h
Fan speed	3
Timer	1 to 24hours
Working temperature	1~32°C
Water tank (water full level)	5L
N.W./G.W.	7.5/8.6kg
Product size (WxDxH)	340 x 232 x 511mm
Carton size (WxDxH)	383 x 268 x 566mm
Container loading q'ty	510/1045/1045 sets (20'GP/40'GP/40'HQ)

Breathe Pure, Live Better






3 Stage Filtration, True HEPA filter,
WiFi control included



- ✦ **CADR:** 370 m³/h (suitable for rooms up to 80m²)
3-Stage Filtration System:
- ✦ **Primary Filter:** Captures pet fur, large dust particles, and hair.
- ✦ **True H12 HEPA Filter:** Removes 99.97% of airborne allergens, including pollen, mold spores, dust, pet dander, and microbes.
Active Carbon Filter: Eliminates smoke, VOCs, cigarette fumes, harmful gases, pet odors, and food odors.
- Advanced Air Quality Detection:**
Equipped with a laser particle sensor that detects indoor PM levels and automatically adjusts operation based on real-time air quality.
- EC Motor Fan:** Low power consumption, energy-saving, and quiet operation.
- Custom Settings:**
Favorite time and air quality setting mode.
5 ventilation speeds.
Sleep mode (switches to low speed after 30 minutes for a quiet sleep environment).
UV-C Light & TiO₂ Disinfection: Keeps the filter free from bacteria.
- ✦ **Super Quiet Operation:** Operates at 21 dB in sleep mode.
- ✦ **Perfectly Sealed Case:** Prevents uncleaned or non-sanitized air from leaking.
- ✦ **Touchscreen Display:** Shows real-time PM2.5 values with a tri-color light ring indicating the current indoor air quality at a glance.
- ✦ **Optional RFID Label:** Easy reading of filter life, available at an additional cost of US\$8 per set.
- ✦ **WiFi Control Function:** Connects to your home via Wi-Fi for convenient control.

Model no.	FGP-40
Power Supply	100-240V~, 50/60Hz
Power Consumption	35W
Particle Purification Efficiency	High
Formaldehyde Purification Efficiency	High
Particle's Clean air Delivery Rate (CADR Particle)	370 m ³ /h
Formaldehyde's Clean Air Delivery Rate (CADR Formaldehyde)	120 m ³ /h
N.W./G.W.	4.9/6.2kg
Product size (WxDxH)	245 x 245 x 525mm
Carton size (WxDxH)	300 x 300 x 580 mm
Container loading q'ty	532/1092/1236 sets (20'GP/40'GP/40'HQ)

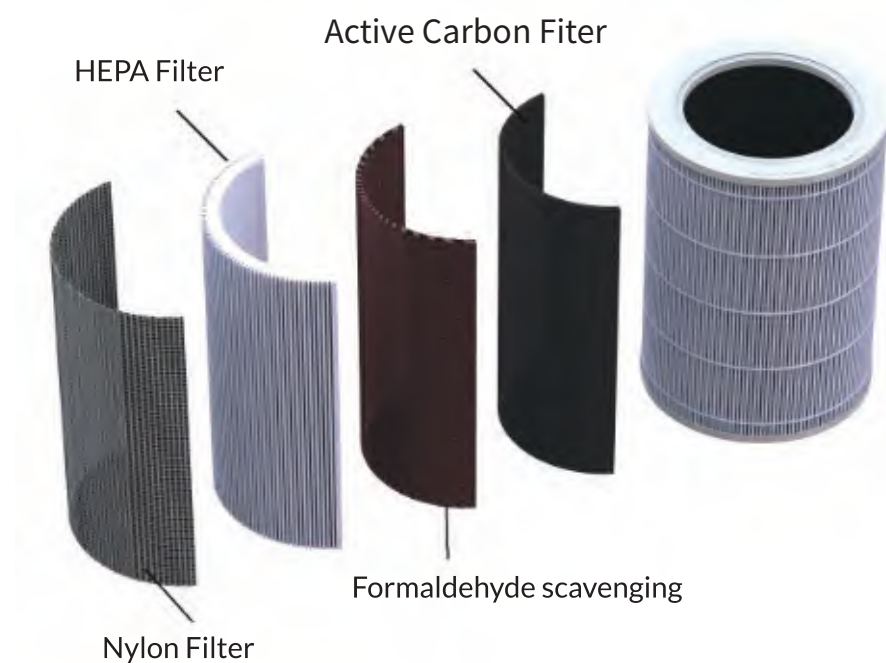

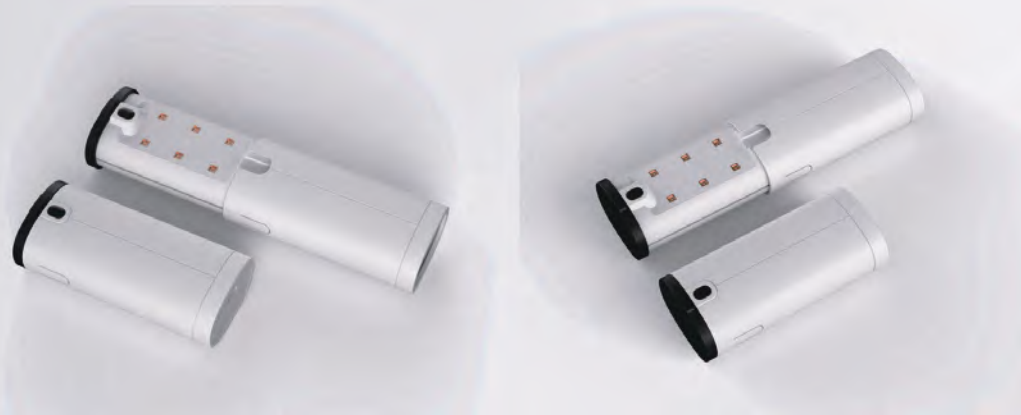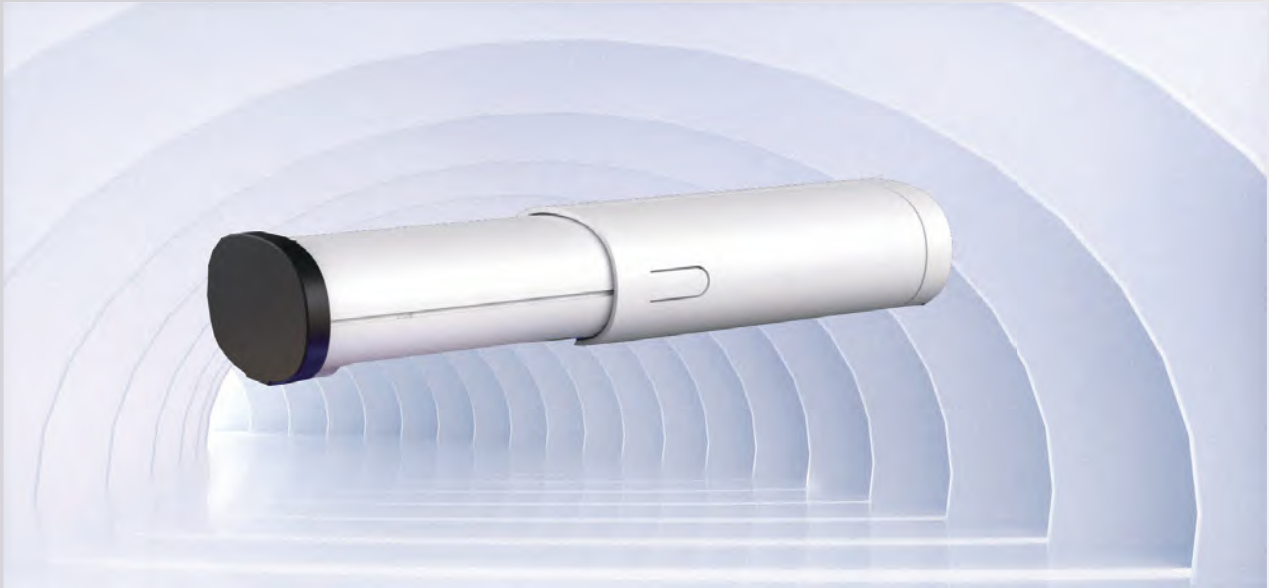


Experience the next level of cleanliness and safety with our cutting-edge UVC sterilizer. Designed to effectively eliminate harmful bacteria, viruses, and other pathogens, our sterilizer ensures a hygienic environment for your home, office, or business. Whether you're sanitizing personal items, electronics, or medical tools, our UVC sterilizer offers a reliable and efficient solution.

Key Features:

- ◆ **High Efficiency:** Powerful UVC light destroys up to 99.9% of germs and bacteria.
- ◆ **Versatile Use:** Suitable for a wide range of items and surfaces.
- ◆ **Safe and Easy to Use:** Intuitive design with safety features for worry-free operation.
- ◆ **Portable and Compact:** Lightweight and easy to carry, perfect for use at home or on the go.

Applications:

It's versatile except for human being or animals, here are some examples:

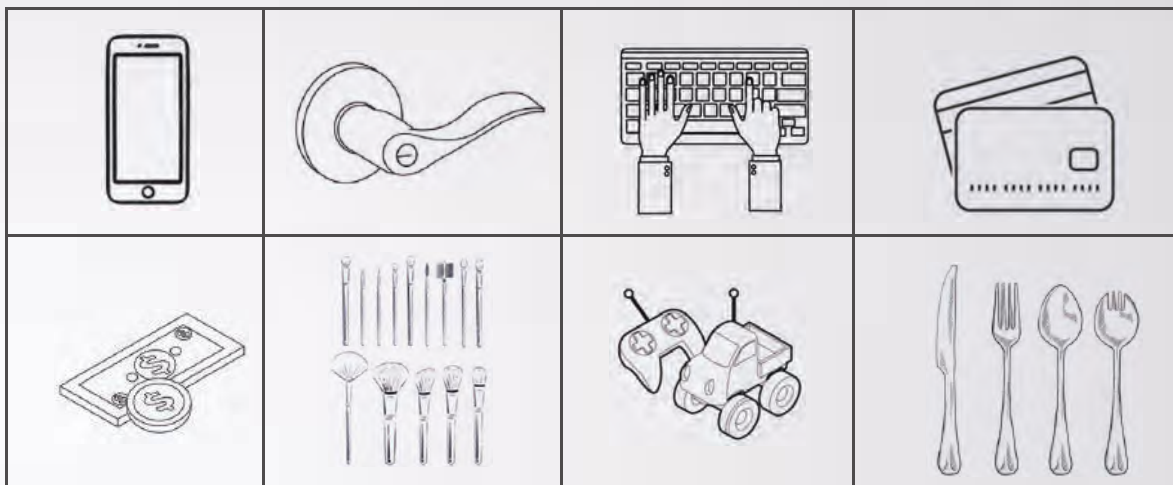

Model no.	K001
Rated Input	5V-2A
UV-C LED Q'TY	6pcs
UV-C wavelength	260-280nm
LED current/power consumption	each 50mA/5mW
Input interface	Type C charging USB
Battery type	Type: Li-ION battery
	Nominal capacity: 2600mAh 9.25Wh
	Nominal voltage: DC 3.7V
	Charging Voltage limitation: DC 4.2V
	Battery Life: full charge - 3.5 hours about
Product size (WxDxH)	46 x 30 x 100 mm
N.W.	98.4g
Packing Size (WxDxH)	290 x 630 x 750 mm @100 sets/ carton